

Manipulation and Fluid Power

October 07, 2008

www.robjackets.org



Manipulation





Keys to Understanding Manipulators

- What is a manipulator?
- What kinds of manipulators are there?
- What are the different types of joints and linkages in a robotic arm?
- How can joints and linkages control an arm's motion (geometrically)?
- What kind of manipulation is a roller / conveyor system good for?
- How can a several manipulator concepts be combined?





What is a Manipulator?

- A mechanism that interacts directly with an object (or objects) of interest.
- Can take many forms
 - Dexterous arms
 - Roller/ conveyor systems
 - Combinations




Types of manipulators

- Dexterous arms
 - Serial
 - Parallel
- Roller / Conveyor systems
 - Single path
 - Mass flow
- Combinations





Manipulation – Arms





Dexterous Arms – Terms


- Dexterous
 - Able to move to several positions and orientations
- Serial Manipulator
 - Arm formed by a single chain of linkages
- Parallel Manipulator
 - Formed by multiple linkage chains
- Rotation
 - Change in an objects orientation (angle)
- Translation
 - Change in an objects position
- Degrees of Freedom
 - Number of ways in which the arm can move.

RoboJackets



Dexterous Arms – Components

- Linkages
 - Rigid or flexible lengths of material
- Joints
 - Connection points between linkages can allow for rotation (rotary joints) or translation (sliding / prismatic joints)
- End Effector
 - Mechanism at the end of an arm that directly contacts the object of interest




RoboJackets




Joints

- Joints allow for controlled motion of one linkage relative to another
- Rotary or hinge joints allow rotation around a pivot



- Prismatic or sliding joints allow translation along one axis




RoboJackets



Linkages

- Single bar
 - Mostly rigid long piece of material
 - End of the bar changes orientation as the bar rotates




RoboJackets



Linkages

- Parallel bar
 - A parallelogram created using single bars and hinge joints
 - Can move along an arc without changing orientation of one set of bars




RoboJackets



Arm Geometry

- Trigonometry
 - By using arm angles and linkage lengths, the position of the end can be found.
 - This can be simplified using projections of the linkages onto the x and y axes.




RoboJackets



Arm Geometry

- With multiple linkages and joints the projections on the x and y axes just need to be added to find the final position of the arm's end.




RoboJackets



Workspaces

- Maximum reachable workspace
 - The largest possible reachable area around your arm



RoboJackets



Manipulation – End Effectors

RoboJackets



End Effectors




- End effectors are at the end of a robot arm and interact with the objects being manipulated.
 - Passive
 - Hooks and adhesive end effectors that do not have a powered grip
 - Active
 - Grippers, suction cups and other powered grasping devices

RoboJackets



End Effectors

- Active grippers
 - More complex, but end up being more reliable in cases where the robot is moving with an object.
 - Geometry must match the object(s) being grasped
 - Note : Consider objects deformation properties.



RoboJackets



Rollers/Conveyors

- Good at moving large amounts of similar objects quickly.
- Past FIRST and FTC scoring objects that have been scored with conveyors or rollers.
 - Storage bins
 - Foam balls
 - Rubber balls
 - Softballs

RoboJackets



Types of Rollers



- Rigid rollers are generally good at picking up uniformly-sized, deformable objects
 - Foam balls
 - Inflatable balls
- Soft or deformable rollers are generally better at picking up harder or variable sized objects
 - Softballs

RoboJackets



Enclosed Conveyor Systems

- Single belt
 - Rolls the object against a stationary surface
- Double belt
 - Translates the object between two conveyor belts
 - Object moves twice as fast as in a single belt system with the same belt speed




RoboJackets



Enclosed Conveyor Systems

- Smooth belt
 - Belt provides more contact area with object
 - Has the ability to slide if there is a buildup of objects
- Profiled
 - Belt does not rely on friction but uses the geometry of the object to provide support
 - Used to stack boxes in 2003 FRC




RoboJackets



Conveyor / Arm / Roller Combinations

- Grippers can use rollers to grasp objects and rotate them in their grasp



- Arms with limited dexterity can use rollers or conveyors to align objects for pickup
- Enclosed conveyors can be articulated like a simple arm to score several items quickly and semi-dexterously

RoboJackets



Powering

- All previously mentioned methods from driving a robot apply
 - Gears
 - Chain
 - Belts
- Primarily seen with manipulators
 - Lead screws
 - Worm gears
 - Rack and Pinion
 - Pulley systems with cable
 - Pneumatics

RoboJackets



Fluid Power

RoboJackets



What is Fluid Power?

- Pressurized fluid does the work
- Hydraulics
 - Oil
 - Water
 - Other fluids
- Pneumatics
 - Air
 - Nitrogen
 - Hot gases
 - Other gases





When to use fluid power

- Electric
 - High speed but low torque (force) → requires gears
 - Control is often more precise and rapid and less expensive
- Hydraulic and pneumatic
 - Speed/torque combo is well suited to many motion applications
 - Well suited to high forces
 - Can be delivered “around the corner”
 - Control is usually by throttling, hence wastes energy
- Center for Compact Efficient Fluid Power
 - A brazen commercial






Hydraulics is Especially critical to the Mobile Equipment Industry





Mobile equipment (construction)

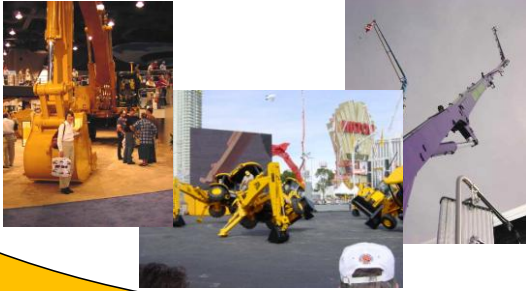

RoboJackets



Pneumatics compared to hydraulics


- No problems of a spills
- Compressibility stores energy
 - Available for your use
 - Dangerous if excessive volumes or pressures
- Difficult to control precisely
- Fluid is readily available
 - Should be filtered, dry
- Usually lower forces



RoboJackets



Pressure of an "ideal" Gas



- Pressure of a gas is due to the force of gas molecules bouncing off the walls.
- Pressure increases when molecules are moving faster, heavier, or if there are more molecules.
- Molecules move faster when they are hot.
- mR depends on molecule.

$$P \times V = mR \times T$$

RoboJackets



Getting Work out of Air



- Work is force acting over a distance of motion, e.g. Newton x meters
- Put air in a container under pressure
- Allow part of the container to expand
- The expanding part does work

RoboJackets




How much energy is in your tank?

- Tank Volume = 150 ml or 9.154 in³
- Pressure = 413,700 Pa or 60 psi
- Atmospheric pressure = 101,325 Pa or 14.7 psi
- Answer:
 - Assume constant temperature:
 $PV = nRT = \text{constant}$
 - Work = $PV \ln(P/P_{\text{atm}})$
 $= 0.15 \times 413,700 \times \ln(4.083) = 87.3 \text{ kJ}$

RoboJackets




Alternative Work Possibilities

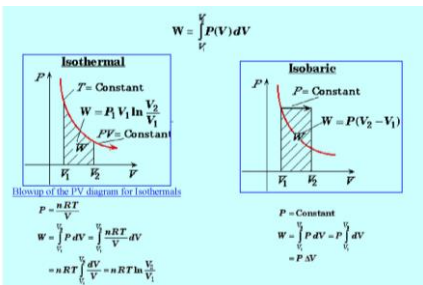

RoboJackets



More work possibilities

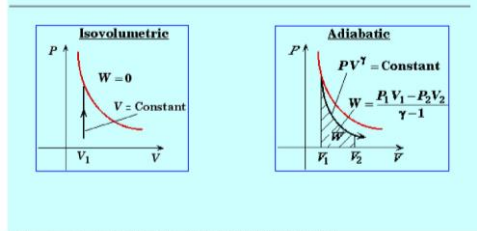

http://www.ac.wvu.edu/~center/Physics/Topics/Thermal/PV_Work/Diag.html (1 of 2) 10/23/2006 1:07:17 PM





How much energy in your tank can you use?

- Line losses:
Pressure drop proportional to flow
- Throttling losses:
Pressure drop proportional to flow squared
- Cylinder friction:
Coulomb plus viscous friction, depends on seals






Force available

- Pressure x Area = Force
- Area = pi x Bore² / 4
- For Festo cylinder (at 80psi or 5.516 bar):
 - Bore = 20 mm → Area = 314 mm²
 - Force = 551,600 x 314 x 10⁻⁶ = 173 N
 - at 100 psi: F = 217 N






The Effect of Different Areas

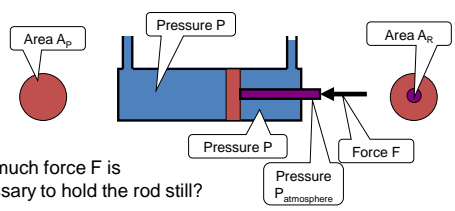

How much force F is necessary to hold the rod still?



The Effect of Different Areas

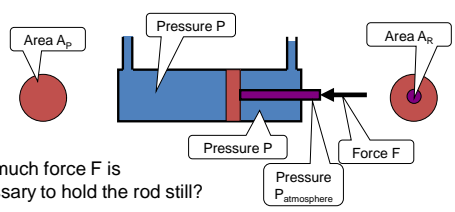

How much force F is necessary to hold the rod still?

Answer: Force to the right = Force to the left
 $P \times A_p = P \times (A_p - A_R) + P_{atm} \times A_R + F$

$$F = A_R \times (P - P_{atm})$$



Basic Operation of the Servo Valve (single stage)

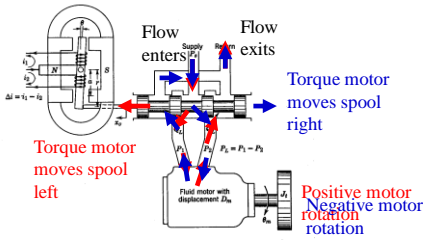



Figure 7-11 Schematic of a single stage electrohydraulic servo valve connected to a motor with inertia load.






Components for hands on task

- Cylinder: single acting, spring return
 - Max force: 169 N or 38 lbf
 - Stroke: 50 mm or 1.987 in
 - Bore: 20 mm or 0.787 in
- Valve:
 - 4-way, 2-position
 - normally closed, vents to atmosphere
- Reservoir:
 - Size: 400 ml or 24.4 in³
 - Max pressure: 16 bar (10⁵ bar) or 232 psi



RoboJackets

Pneumatic Kit

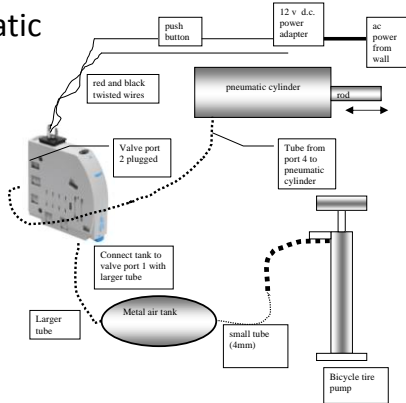



Some YouTube Videos

- http://www.youtube.com/watch?v=jkft2qaKv_o
- <http://www.youtube.com/watch?v=0gk-yQ1H3M8>
- <http://www.youtube.com/watch?v=7l0qIO7y6Cc>
- <http://www.youtube.com/watch?v=2cluuplWRIQ>

RoboJackets
